

## Features:

- More output for less power
  - No UV or IR emissions
  - Unprecedented 60,000 hour warranty on the LED's
  - 3-year warranty on the fixture itself
  - Full brightness control (dimnable) without color shift
  - 1,854 foot-candles @ 10ft.
  - Draws 1.77 amps of power @ 110v AC
  - Run on 30v DC power for hours w/ battery source
  - 90% energy savings
  - Single light-source that eliminates multiple shadows
  - Douse (Intermittent off) Switch
  - Convection cooled with no fans
  - Operates cool-to-the-touch and runs silent
  - Operating Temperature -20c to +50c
  - DMX compatible | loop through
  - Quick-change lenses to adjust beam spread
  - Universal power-supply from 90VAC to 240VAC
  - Flexible enough to use in many applications
  - User interface with recalibration countdown hour meter \*
  - Programmable Functions with Lightning and Strobe effects\*
  - Certified ETL, UL, CSA, CE and RoHS compliant
- \* Optional

No Diffuser	@5 Feet	@10 Feet	@15 Feet
Lux	74,710	19,960	9,004
Foot Candles	6,940	1,854	836

15° Diffuser	@5 Feet	@10 Feet	@15 Feet
Lux	39,100	9,935	4,693
Foot Candles	3,632	923	436

30° Diffuser	@5 Feet	@10 Feet	@15 Feet
Lux	16,020	3,934	1,765
Foot Candles	1,488	366	164

55° Diffuser	@5 Feet	@10 Feet	@15 Feet
Lux	5,919	1,469	680
Foot Candles	550	136	63

Specifications	
Control	Local, UIM, DMX
Wireless	Optional
RDM	Optional
Source	LED, 5600°K
Life Expectancy	60,000 Hours
Cooling	Passive
Mounting	Baby Pin
Certifications	ETL, UL, CSA, CE and RoHS Compliant

Diffuser	Beam Angle	Field Angle
0°	15.2°	29.0°
15°	20.8°	38.6°
30°	34.3°	61.2°
55°	50.0°	88.5°

Diffuser	Lumens	Candelas
0°	10,356	182,388
15°	9,746	93,737
30°	10,915	36,883
55°	9,336	14,162


At 90° angle to incident surface

Dimensions		
Length	339.0 mm	13.3 in
Width	326.5 mm	12.9 in
Height	554.9 mm	21.8 in
Weight	8.9 kg	19.5 lbs

Power		
Input Voltage	100-277v AC	Battery (30v DC)
Input Freq	50/60 Hz	
Input Current	1.77 Amp @120V	212 Watts @ full
Connection	US NEMA 5-15	Others Available

## Highlights:

- RoHS Compliant
- 1,854 foot candles @10 feet
- Daylight-Balanced at 5600°K
- Dimmable with no color shift
- Draws 1.7 amps at max output

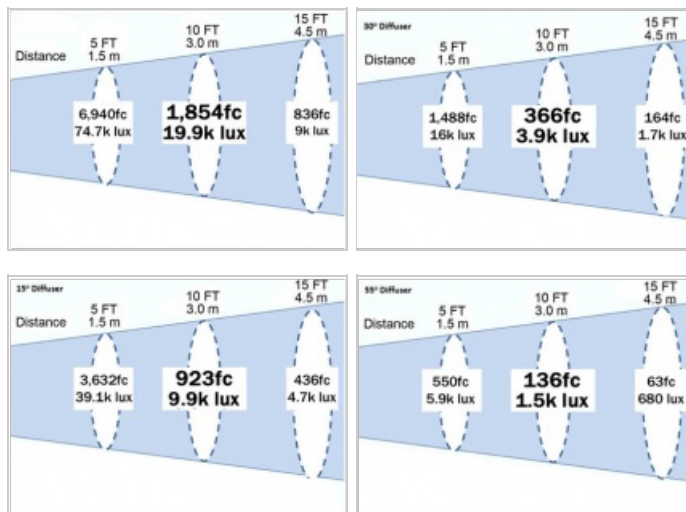

Designed, Developed, Engineered and Assembled in the USA using Green Technology

©2013 AAdynTech® All rights reserved.